

NEW! HD523



EHRLE®
www.ehrle.com

The better way to clean

The new Compact-Class for professional H.P. Cleaning!



High Pressure Cleaner

Hot water, mobile, oil heated - Series Etronic I
HD523

HD cleaning with lance



Car cleaning with lance and stainless steel flat jet nozzle



High pressure cleaning with lance and stainless steel flat jet nozzle

Pre-cleaning with attachment kit SoftFoam



Car cleaning with attachment kit SoftFoam lance, Art. No. 410702



Pre-spray with attachment kit SoftFoam lance, Art. No. 410702

Floor cleaning with area cleaner




Area cleaner stainless steel in use Ø 300mm, Art. No. 394078



Area cleaner stainless steel Ø 410mm, Art. No. 394079

3 draft combustion chamber

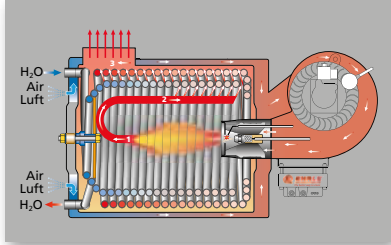

- 3 draft system for high efficiency
- 2 fold flame reversal
- horizontal firing technology
- Blue burner

Brass Pump



- Triplex 3 piston pump
- Stainless steel piston
- Brass pump head
- Stainless steel valves

2 motors system



- Biodiesel suitable
- separate burner motor
- Fuel pump with pressure gauge
- large fuel filter
- Blue burner with high efficiency

Storage tank

- Breakage and collision proof due to rotation technology
- 20 liters
- large filling spout
- ergonomic position

Metal Chassis

- robust with collision protection
- 3 point landing gear
- galvanized sheet steel, powder-coated

Classification system

- Hose drum with 15m HD hose
- Cable drum with 8m electric cable
- Deposit device for HD lance

Temperature controller

- stepless temperature regulation
- ECO level

Patented wheel brake

- Utility model 20 2010 004 954.7
- 3 jaws system
- Brakes on both sides

On/Off switch

- 2 levels
- H.P. Pump
- Heating



Technical data



Type		HD523-Standard
Voltage	1/N/PE/AC/50Hz/230V	<ul style="list-style-type: none"> ▶ Etronic I - Controls ▶ 15m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm with Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Chemical supply with ND-Injector (optional) ▶ Spray-Lance 900mm with Control-Nozzle (optional)
Operating pressure	30-120bar/3-12MPa	
Max. pressure	140bar/14MPa	
Discharge capacity	300-600l/h	
Nozzle size	045	
Hot water capacity	30-98°C	
Pump speed	2800rpm	
Connected load	2,4kW/12,0A	
Electrical protection	13A slow-blowing	
Weight net/with package		118kg/139kg
Dimensions device/with package (LxWxH)		1070x735x1020mm/1160x770x960mm
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, high performance stainless steel piston, stainless-steel valves, leakage-return, Etronic I - controls: (Start-stop system with switch-off delay, total-switch-off after 20min) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain, with a patented wheel brake and swivel-castor, storage possibility for all accessories, integrated diesel-tank 22l, robust rotary on-off switch, 8m connection cable, removable ergonomic drawbar, Hose-reel for H.P. Hose and cord-reel for electric cord.</p>		
Art. No.		413001



Authorized Dealer

Ehrle GmbH

Industriestraße 3
D-89165 Dietenheim
www.ehrle.com

Telefon +49 7303-1600-0
Fax +49 7303-1600-600
Email info@ehrle.com